

2075 COBRA 6

Retractable fall arrester EN 360, webbing length 6m.

Webbing extends and retracts automatically following the movements of the user.

Maximum weight 150 kg. Maximum force in the event of fall <6 kN limited by energy absorber.

Easier use compared to cable models thanks to smaller dimension and lower weight.

Certified for vertical use (standard EN 360 certification).

CE EN 360


CONSTRUCTION PYLONS/INDUSTRY



Individual identification label:
- batch number
- serial number

Strong attachment point

Supplied with guiding cord Ø5 x 6m, useful to guide the webbing back into the retractor.



ABS Shells for best strength




CE label

Polyester energy absorber
Maximum peak force < 6 kN

Polyester webbing
Width: 20 mm
Strength >12 kN
Length 6 m

Vertical use

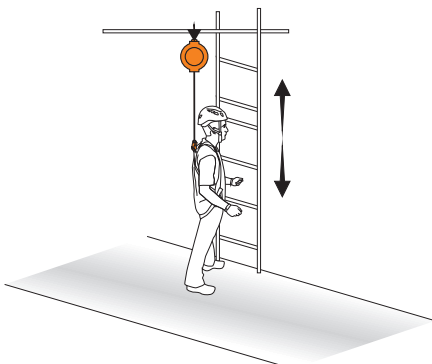

Fall indicator integrated on the connector

Double action safety connector with swivel ref.0925
Strength >23 kN
Opening 20 mm
Zinc Plated